


LED Exit Sign with Battery Backup

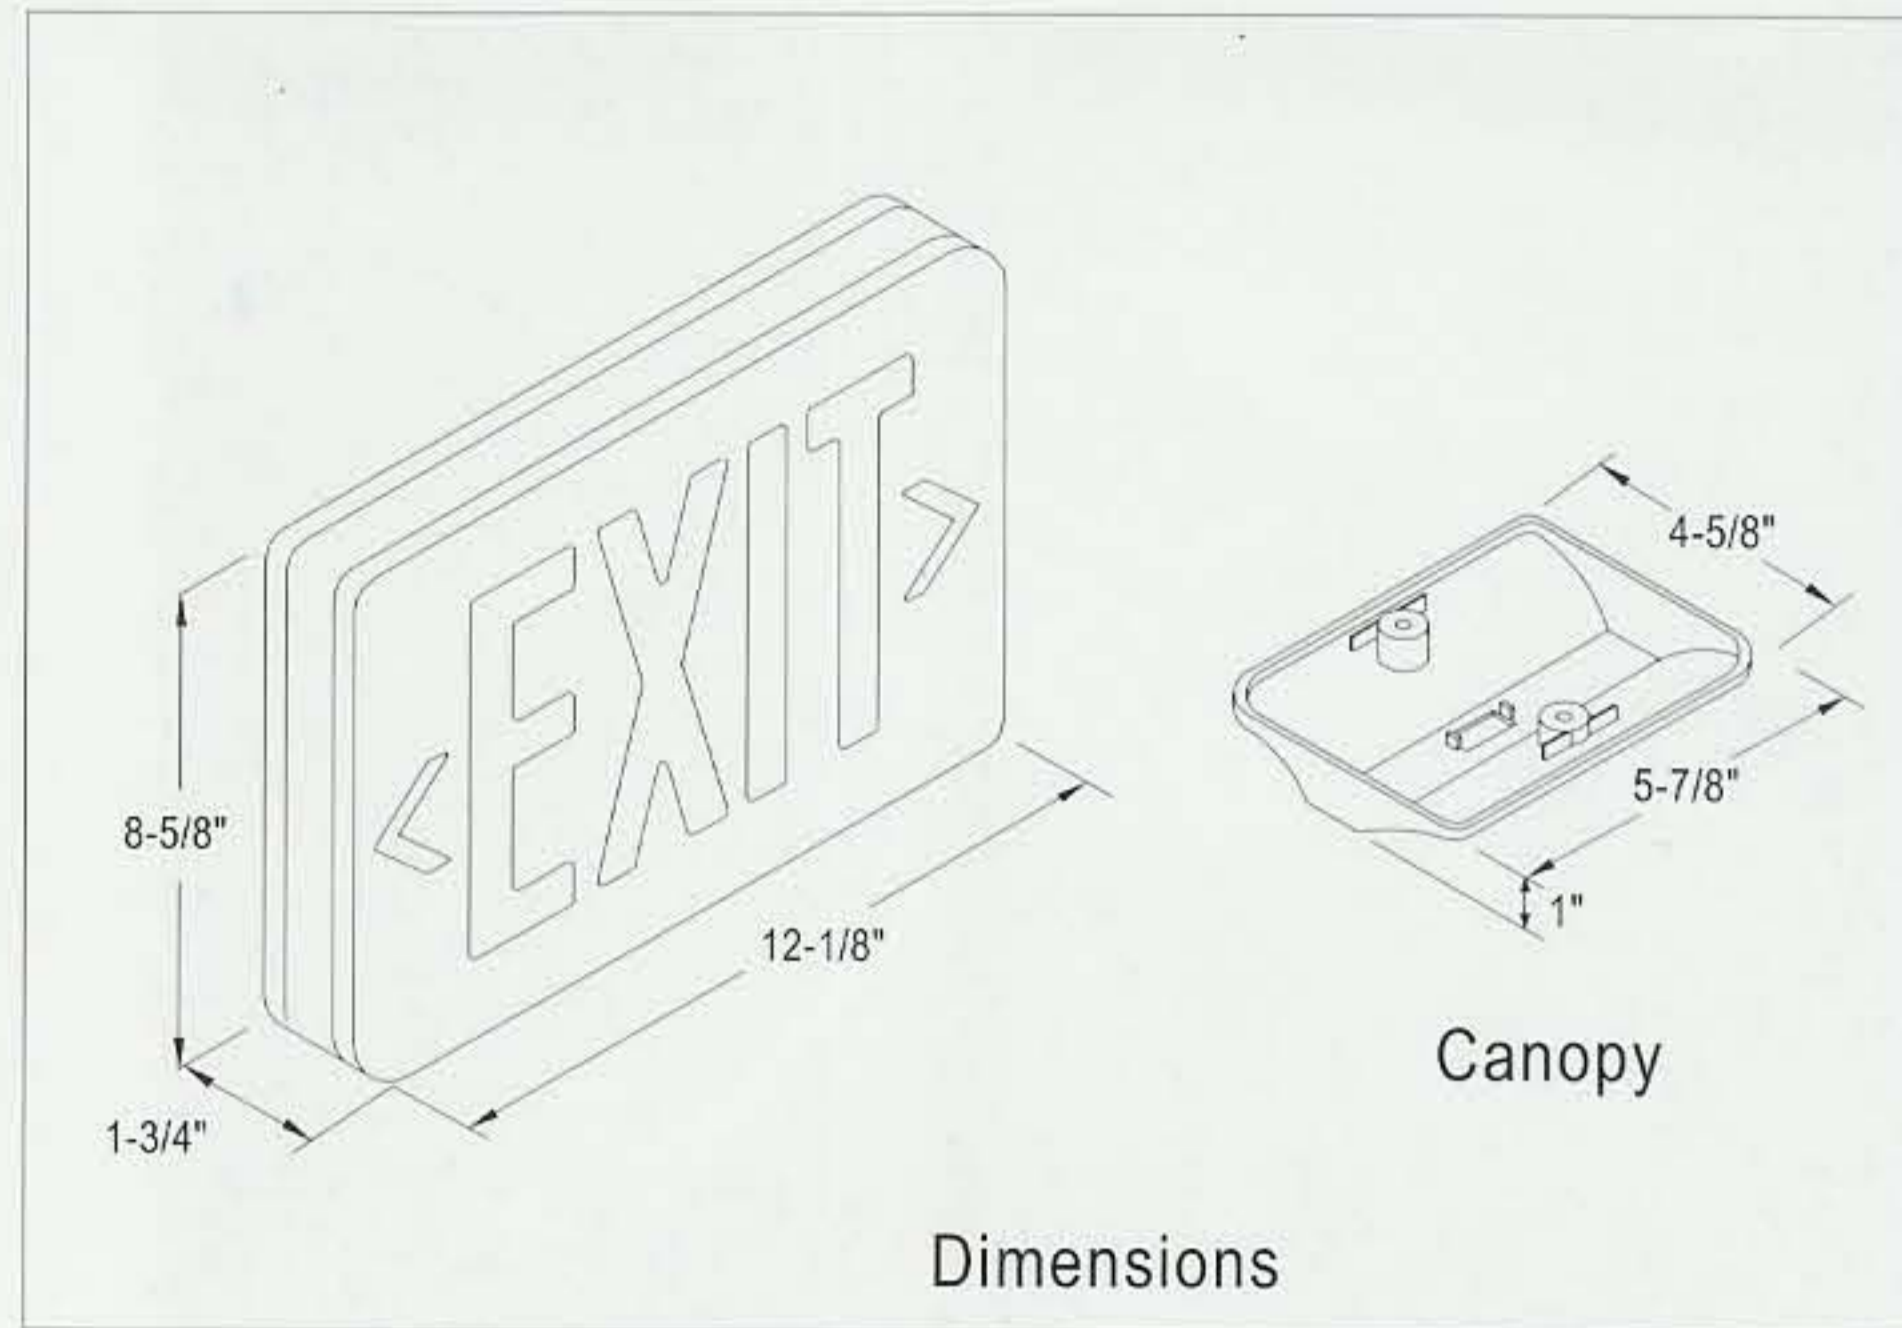

- EX-800R Red LED Exit Sign
- EX-800G Green LED Exit Sign

STANDARD FEATURES

HOUSING

- ▶ Injection-molded thermoplastic ABS housing.
- ▶ UL 94V-0 flame rating.
- ▶ Innovative, snap-together design allows for fast installation.
- ▶ Replaceable directional chevron inserts are easily removed and reinserted.
- ▶ Letters 6" height with 3/4" stroke.
- ▶ Single or double face configuration.

MOUNTING

- ▶ Universal (Wall, Side or Ceiling) mounting.
- ▶ Housing snaps to canopy with simple twist and locking tightly secure housing to canopy.

ELECTRICAL FEATURES

ELECTRICAL

- ▶ 120/277 VAC Dual voltage operation.
- ▶ Low energy consumption-only 2.4 watts at 120V.
- ▶ LED indicator light and push button test switch.

LAMPS

- ▶ LEDs mounted on print circuit board.
- ▶ LED lamps are operating in normal (AC input) and emergency (DC input) modes.

BATTERY

- ▶ Nickel-Cadmium battery (4.8V 650mA) delivers more than 3 hours capacity to emergency lamps.
- ▶ 24-hour recharge after 90 minutes discharge.
- ▶ Low voltage battery disconnection - Preventing deep discharge damage to the battery.

ORDERING INFORMATION

Item No.	Panel Color	Housing Color	IR Test Option	Diagnostics	Application
EX-800	R: Red	W: White	IR1 : 30sec test	CT	DL: Damp location
	G: Green	B: Black	IR2: 30sec or 90min test		